




PARTICULARLY SUITABLE FOR FINISHING AND LEVELLING WORKS. ITS TILTING SYSTEM ENABLES TO TILT IT BY 45° ON BOTH SIDES. THE STANDARD SAFETY BLOCK VALVE ENABLES TO KEEP THE ANGLE. ITS ELONGATED SHAPE AVOIDS THAT THE GROUND STICKS TO THE BUCKET'S SIDE WALLS AND SIMPLIFIES THE DISCHARGE OF LOAMY AND WET MATERIALS. USED MAINLY TO CLEAN AND LEVEL STREETS, DITCHES AND DIKES. THE HOLLAND BUCKET IS EQUIPPED WITH HB400 BLADE.

MOD.	SQN 27GD	SQN 30GD	SQN 35GD	SQN 40GD	SQN 45GD	SQN 50GD	SQN 55GD	SQN 60GD	SQN 65GD	SQN 70GD
TONS (LB)	0,6 - 1,2 (1323 - 2646)	1,2 - 1,8 (2646 - 3968)	1,8 - 2,5 (3968 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 6,0 (8818 - 13228)	6,0 - 7,5 (13228 - 16535)	7,5 - 10,0 (16535 - 22046)	10,0 - 14,0 (22046 - 30865)	14,0 - 16,0 (30865 - 35274)	16,0 - 18,0 (35274 - 39683)



ADAPTERS

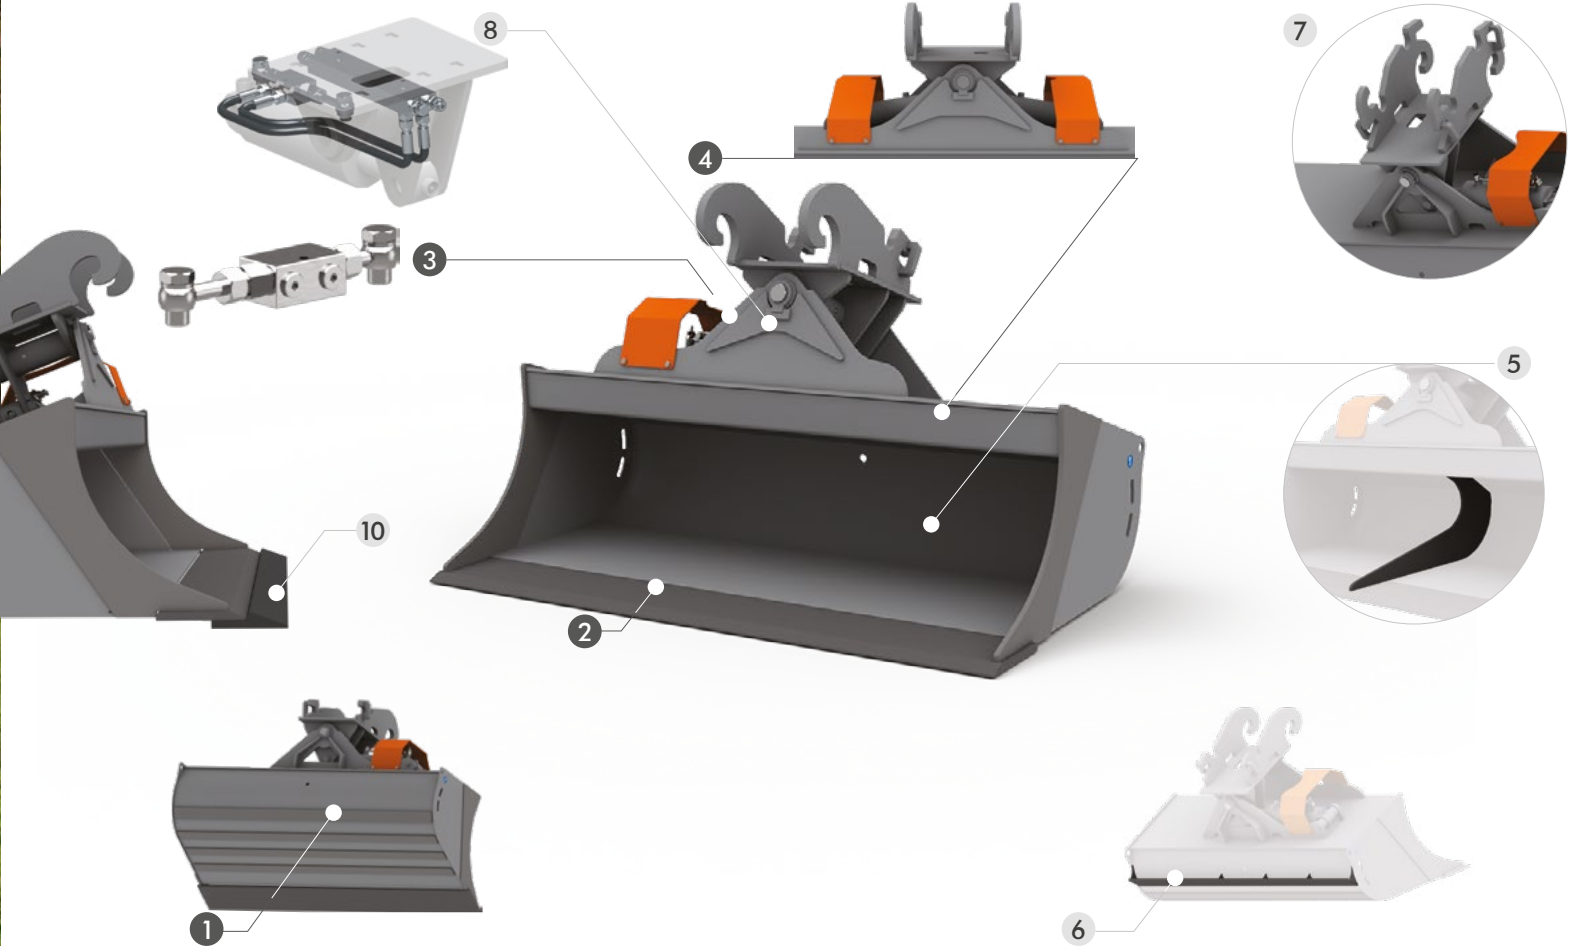

STANDARD TECHNICAL FEATURES

- 1

REINFORCING STRIPS
THE HORIZONTAL REINFORCING STRIPS ON THE BUCKET'S REAR AND BOTTOM PROTECT THE BUCKET FROM WEAR AND INCREASE ITS RESISTANCE.
- 2

HB400 CUTTING EDGE
- 3

BLOCK VALVE
IT ALLOWS TO KEEP THE BUCKET POSITIONING DURING THE WORKING PHASE.
- 4

DOUBLE CYLINDER FOR SQN65, SQN70

OPTIONAL

- 5

BEZEL
IT ENSURES A HIGHER STRUCTURAL RESISTANCE TO BUCKETS WHOSE FRAME IS 1400 MM (55 IN) WIDE OR MORE.
- 6

REAR RAZOR
WHEN THE MACHINE'S ARM IS KEPT CLOSED, IT ALLOWS TO FINISH SURFACES EVENLY.
- 7

CW REVERSIBLE VERSION
THIS ADAPTER MAKES THE BUCKET REVERSIBLE.
- 8

PIPE KIT
OPTIONAL KIT INSTALLED ON THE BUCKET FOR THE FEEDING OF THE HYDRAULIC CYLINDER. IT ALLOWS THE USE OF TWO OUTLETS ON THE RIGHT AND TWO OUTLETS ON THE LEFT FOR THE HYDRAULIC CONNECTION TO THE MACHINE REDUCING THE INSTALLATION TIMES. THE CONNECTING PIPES ARE NOT SUPPLIED.
- 9

HB500 WELDED ADDITIONAL CUTTING EDGE
RECOMMENDED TO WORK ON PARTICULARLY ABRASIVE SOILS.

SQN27 GD

MACHINE WEIGHT 0,6 - 1,2 (1323 - 2646 lb)

ADAPTERS

AR15

KG 7 (LB 15)

CS10

KG 10 (LB 22)

CS10 JANUS PRO

KG 10 (LB 22)

CR15

KG 10 (LB 22)

CM20

KG 10 (LB 22)

S30-150

KG 6 (LB 13)

S30-180


KG 8 (LB 17)

CW00

KG 5 (LB 11)

CW05

KG 9 (LB 19)

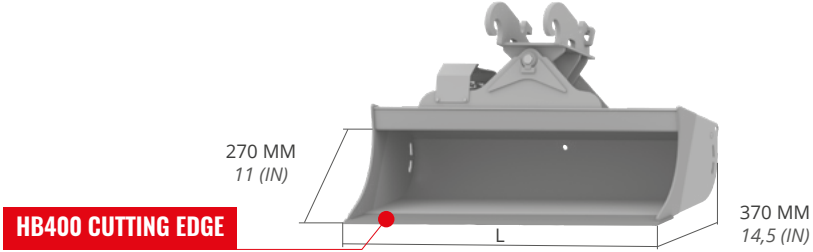

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	50 (110)	50 (13,2)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO

7	8	9	10
REAR RAZOR	CW REVERSIBLE VERSION	PIPE KIT	HB500 WELDED ADDITIONAL CUTTING EDGE

SQN35 GD

MACHINE WEIGHT 1,8 - 2,5 (3968 - 5512 lb)

ADAPTERS

AR30

KG 10 (LB 22)

CS10

KG 10 (LB 22)

CS10 JANUS PRO

KG 10 (LB 22)

CR30

KG 13 (LB 28)

CM30

KG 12 (LB 26)

S30-150


KG 6 (LB 13)

S30-180

KG 8 (LB 17)

CW05

KG 9 (LB 19)

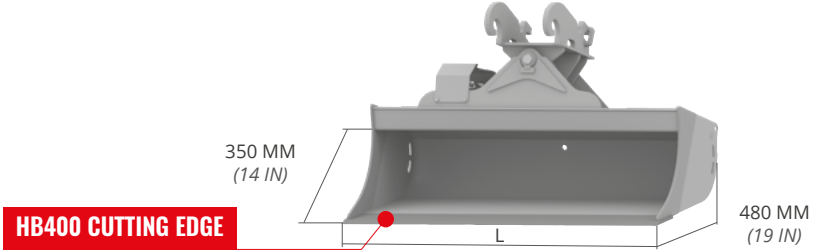

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	83 (183)	125 (33,0)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1100 (43)	89 (196)	135 (35,7)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1200 (47)	95 (209)	145 (38,3)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO

7	8	9	10
REAR RAZOR	CW REVERSIBLE VERSION	PIPE KIT	HB500 WELDED ADDITIONAL CUTTING EDGE

SQN30 GD

MACHINE WEIGHT 1,2 - 1,8 (2646 - 3968 lb)

ADAPTERS

AR15

KG 7 (LB 15)

CS10

KG 10 (LB 22)

CS10 JANUS PRO

KG 10 (LB 22)

CR15

KG 10 (LB 22)

CM20

KG 10 (LB 22)

S30-150


KG 6 (LB 13)

S30-180

KG 8 (LB 17)

CW05

KG 9 (LB 19)

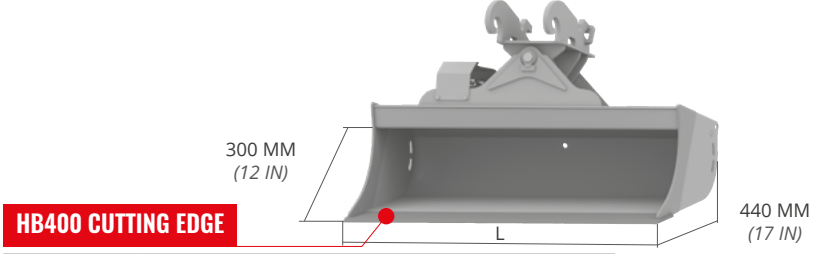

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	57 (126)	83 (21,9)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
900 (35)	61 (134)	91 (24,0)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1000 (39)	65 (143)	99 (26,2)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO

7	8	9	10
REAR RAZOR	CW REVERSIBLE VERSION	PIPE KIT	HB500 WELDED ADDITIONAL CUTTING EDGE

SQN40 GD

MACHINE WEIGHT 2,5 - 4,0 (5512 - 8818 lb)

ADAPTERS

AR40

KG 11 (LB 24)

CS30

KG 18 (LB 39)

CS30 JANUS PRO

KG 19 (LB 41)

CR40

KG 14 (LB 30)

CM30

KG 12 (LB 26)

S40-200


KG 15 (LB 33)

S40-240

KG 17 (LB 37)

CW05

KG 9 (LB 19)

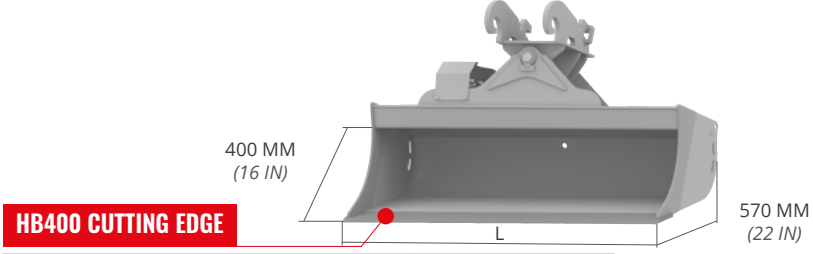

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	128 (282)	160 (42,3)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1100 (43)	136 (300)	174 (46,0)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1200 (47)	143 (315)	188 (49,7)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO

7	8	9	10
REAR RAZOR	CW REVERSIBLE VERSION	PIPE KIT	HB500 WELDED ADDITIONAL CUTTING EDGE

* weight of the tank excluding attachment

* weight of the tank excluding attachment

SQN45 GD

MACHINE WEIGHT 4,0 - 6,0 (8818 - 13228 lb)

ADAPTERS

AR50

KG 17 (LB 37)

CS30

KG 18 (LB 39)

CS30 JANUS PRO

KG 19 (LB 41)

CR50

KG 22 (LB 48)

CM100

KG 35 (LB 77)

S40-200


KG 15 (LB 33)

S40-240

KG 17 (LB 37)

CW10

KG 23 (LB 50)

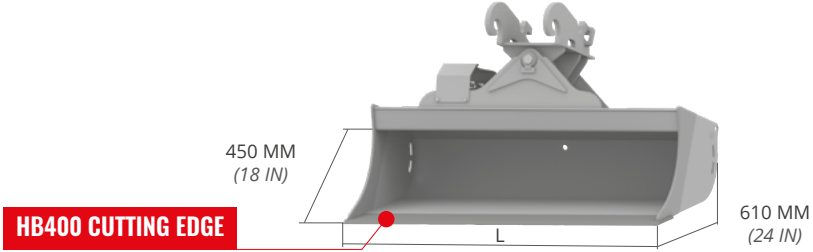

HB400 CUTTING EDGE

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	146 (322)	202 (53,4)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1100 (43)	155 (342)	220 (58,1)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1200 (47)	161 (355)	238 (62,9)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1400 (55)	182 (401)	274 (72,4)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO

OPTIONAL

6

BEZEL

7

REAR RAZOR

8

CW
REVERSIBLE
VERSION

9

PIPE KIT

10

HB500 WELDED
ADDITIONAL
CUTTING EDGE

SQN55 GD

MACHINE WEIGHT 7,5 - 10,0 (16535 - 22046 lb)

ADAPTERS

CS80

KG 44 (LB 97)

CS80 JANUS PRO

KG 46 (LB 101)

CR70

KG 34 (LB 75)

CM100

KG 35 (LB 77)

S45


KG 28 (LB 61)

S50

KG 29 (LB 63)

CW10

KG 23 (LB 50)

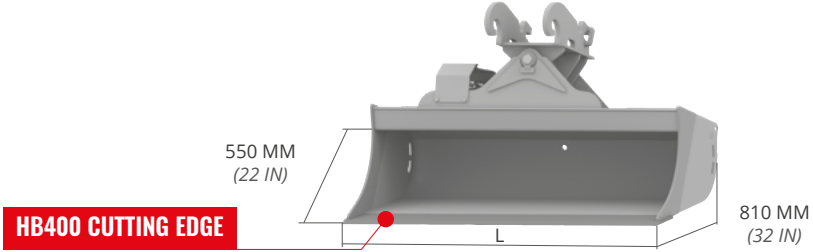

HB400 CUTTING EDGE

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1400 (55)	302 (666)	440 (116,2)	AF - CS
			CR - S - CM
			CW - CS JANUS PRO
1500 (59)	316 (697)	465 (122,8)	AF - CS
			CR - S - CM
			CW - CS JANUS PRO
1600 (63)	392 (725)	490 (129,4)	AF - CS
			CR - S - CM
			CW - CS JANUS PRO
1800 (71)	356 (785)	565 (149,3)	AF - CS
			CR - S - CM
			CW - CS JANUS PRO

OPTIONAL

6

BEZEL

7

REAR RAZOR

8

CW
REVERSIBLE
VERSION

9

PIPE KIT

10

HB500 WELDED
ADDITIONAL
CUTTING EDGE

SQN50 GD

MACHINE WEIGHT 6,0 - 7,5 (13228 - 16535 lb)

ADAPTERS

AR70

KG 24 (LB 52)

CS80

KG 44 (LB 97)

CS80 JANUS PRO

KG 46 (LB 101)

CR70

KG 34 (LB 75)

CM100

KG 35 (LB 77)

S45


KG 28 (LB 51)

S50

KG 29 (LB 63)

CW10

KG 23 (LB 50)

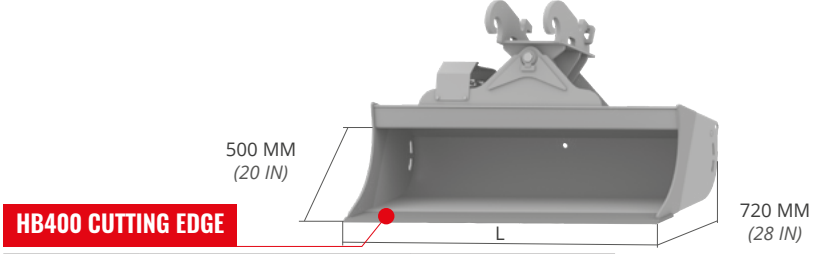

HB400 CUTTING EDGE

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	212 (467)	315 (83,2)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1300 (51)	223 (492)	335 (88,5)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1400 (55)	234 (516)	355 (93,8)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO
1600 (63)	256 (564)	395 (104,3)	AF - AR - CS
			CR - S - CM
			CW - CS JANUS PRO

OPTIONAL

6

BEZEL

7

REAR RAZOR

8

CW
REVERSIBLE
VERSION

9

PIPE KIT

10

HB500 WELDED
ADDITIONAL
CUTTING EDGE

SQN60 GD

MACHINE WEIGHT 10,0 - 14,0 (22046 - 30865 lb)

ADAPTERS

CS100

KG 45 (LB 99)

CS100 JANUS PRO

KG 93 (LB 205)

CM180


KG 66 (LB 145)

S60

KG 57 (LB 125)

CW20

KG 48 (LB 106)

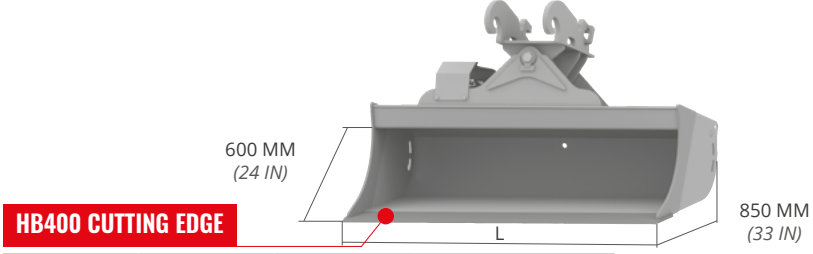

HB400 CUTTING EDGE

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1400 (55)	332 (732)	510 (134,7)	AF - S - CM
			CS - CW
			CS JANUS PRO
1500 (59)	347 (765)	550 (145,3)	AF - S - CM
			CS - CW
			CS JANUS PRO
1600 (63)	362 (798)	580 (153,2)	AF - S - CM
			CS - CW
			CS JANUS PRO
1800 (71)	390 (860)	640 (169,1)	AF - S - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

6

BEZEL

7

REAR RAZOR

8

CW
REVERSIBLE
VERSION

9

PIPE KIT

10

HB500 WELDED
ADDITIONAL
CUTTING EDGE

* weight of the tank excluding attachment

* weight of the tank excluding attachment